

Sidewall and leading edge capped
with round rod welded to sidewall
edges.

Sit down bar
prevents walking
into slide.
ASTM requirement

Deck is two layers. Top layer is
diamond plate to allow traction
and prevent slips at entrance.
Plate may stop at fascia or may
extend/overlay a few inches at
upper elevation.


Bracket is powdercoated to match
color. Shipped loose, At installation,
join bracket to side and fascia of
opening at upper level

Many of our designs request the ability to configure the entrance/transition deck to be able to easily attach to the barriers present on the upper elevation. This design modification/option allows for each attachment to a squared edge such as a terminus post on the barrier. Create an opening at your upper level, insert O.D. of the box into the I.D. of your opening and bolt to attach or close

Top Rod Cut Back

Front (leading edge) rod removed to facilitate flat or flush surface to join to barrier, rail or entrance framing

Bracket shipped loose
Attach at installation

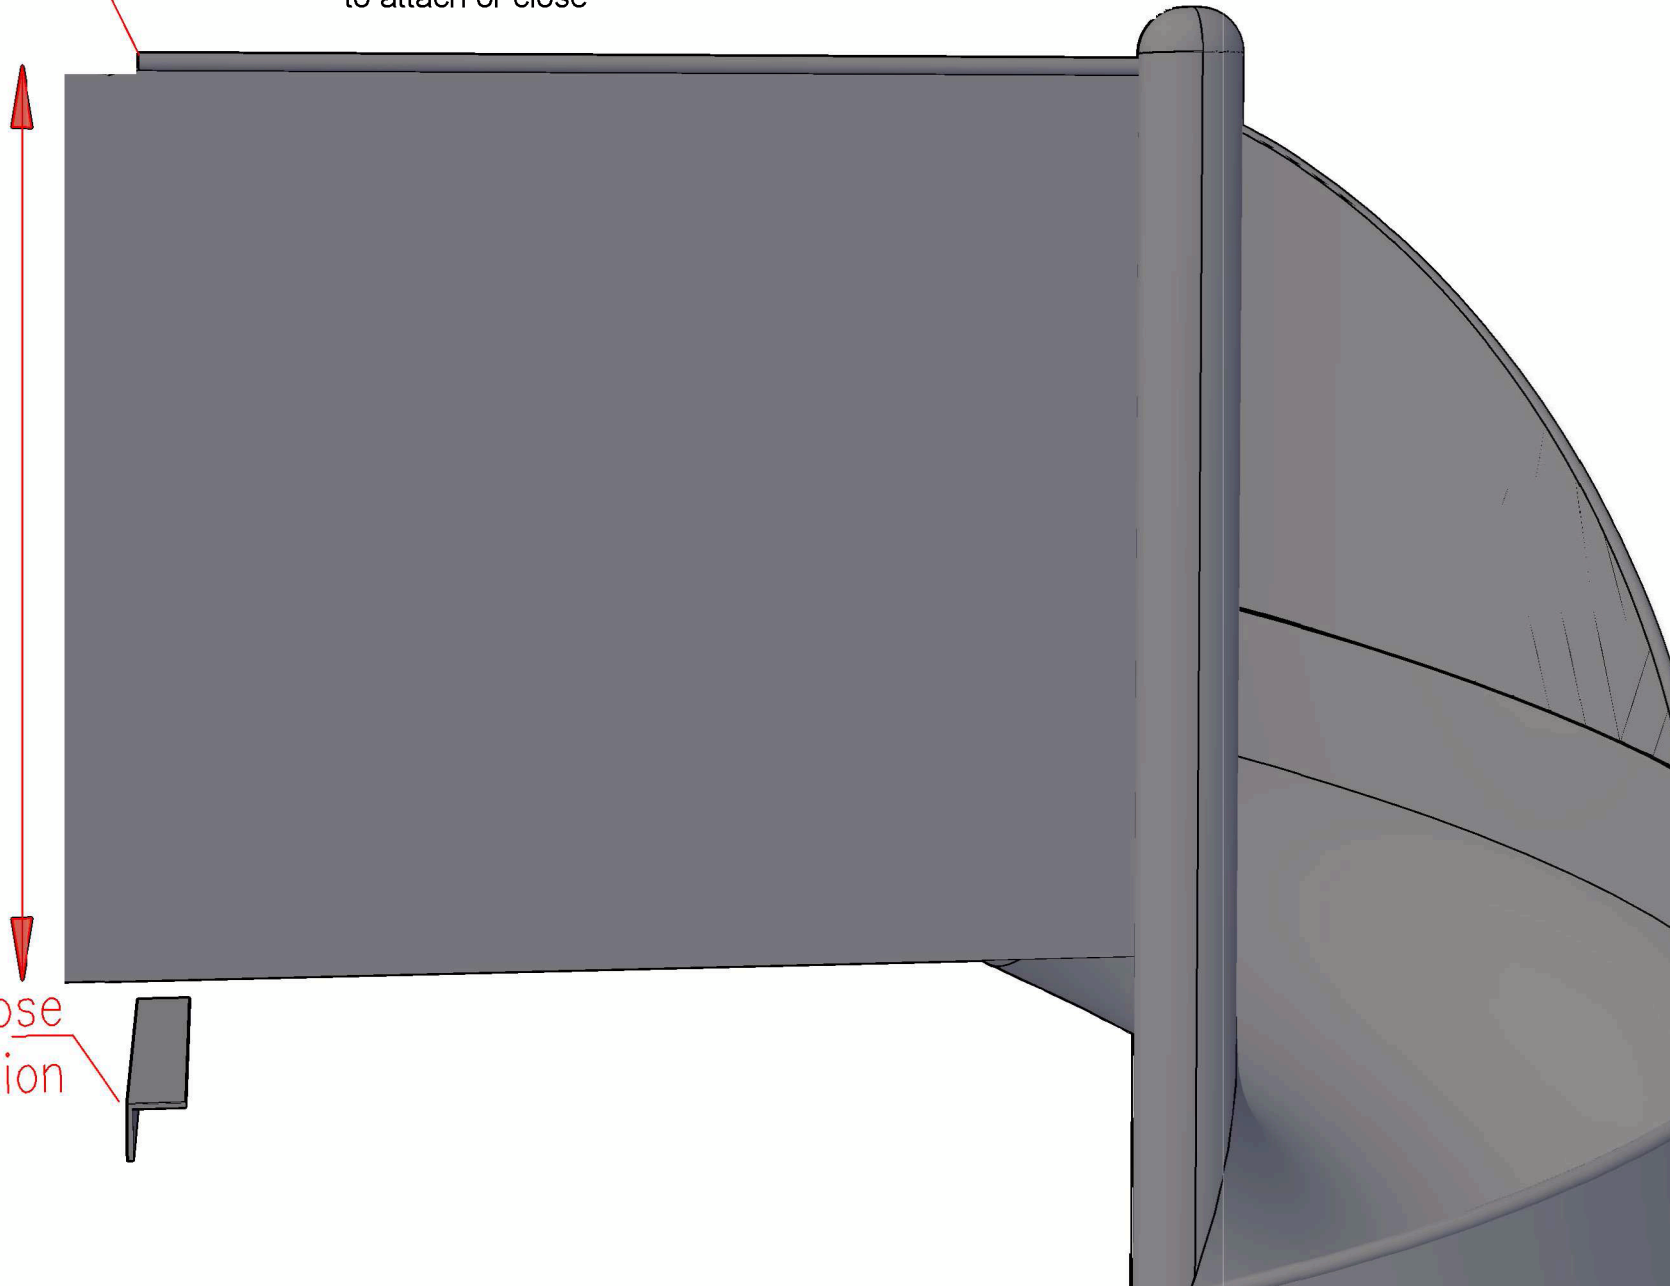

Variable Min 32"
Preferred = />34"

